


Hose Adapters

Models HSA, HNA, HPA & HLA

(1/2" thru 2")

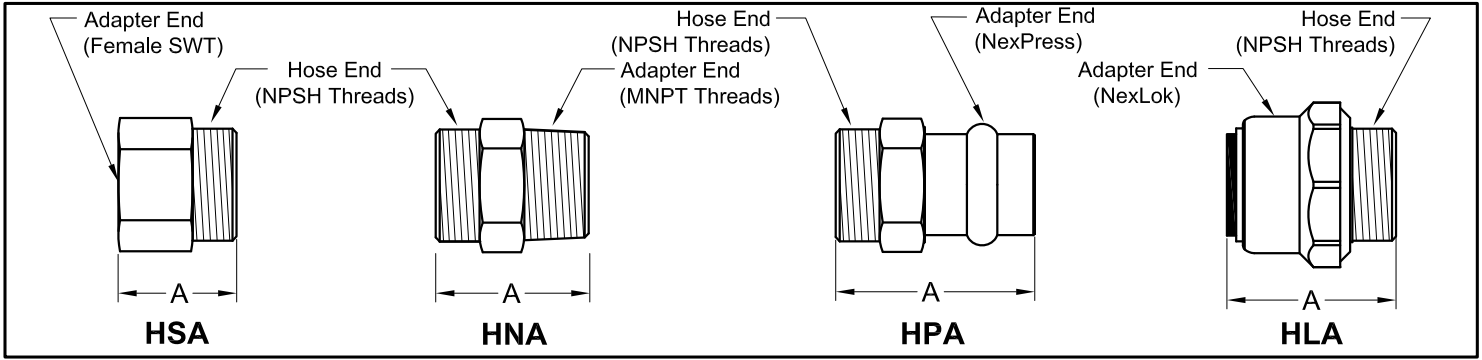

Part #	Hose End NPSH	Adpt. End Nex Press	A	HEX	WT [lbs]
HPA-050	1/2"	1/2"	1.53"	0.87"	0.11
HPA-075	3/4"	3/4"	1.84"	1.05"	0.19
HPA-075-050	3/4"	1/2"	1.57"	1.05"	0.15
HPA-100	1"	1"	1.80"	1.37"	0.25
HPA-100-075	1"	3/4"	1.80"	1.37"	0.27

Part #	Hose End NPSH	Adpt. End MNPT	A	HEX/OCT	WT [lbs]
HNA-050	1/2"	1/2"	1.33"	7/8"	0.10
HNA-075	3/4"	3/4"	1.65"	1 1/16"	0.27
HNA-075-050	3/4"	1/2"	1.38"	1 1/16"	0.15
HNA-100	1"	1"	1.80"	1 3/8"	0.38
HNA-100-050	1"	1/2"	1.44"	1 3/8"	0.11
HNA-100-075	1"	3/4"	1.61"	1 3/8"	0.33
HNA-125	1 1/4"	1 1/4"	1.88"	1 3/4"	0.37
HNA-125-075	1 1/4"	3/4"	1.61"	1 1/4"	0.38
HNA-125-100	1 1/4"	1"	1.80"	1 3/8"	0.45
HNA-150	1 1/2"	1 1/2"	2.03"	2"	0.50
HNA-200	2"	2"	2.21"	2 1/2"	0.76

Part #	Hose End NPSH	Adpt. End Fem. SWT	A	HEX/OCT	WT [lbs]
HSA-050	1/2"	1/2"	1.00"	7/8"	0.09
HSA-050-038	1/2"	3/8"	0.75"	5/8"	0.05
HSA-075	3/4"	3/4"	1.25"	1 1/16"	0.14
HSA-075-050	3/4"	1/2"	0.88"	3/4"	0.08
HSA-100	1"	1"	1.50"	1 3/8"	0.28
HSA-100-050	1"	1/2"	0.87"	3/4"	0.13
HSA-100-075	1"	3/4"	1.31"	1 3/8"	0.29
HSA-125	1 1/4"	1 1/4"	1.47"	1 3/4"	0.20
HSA-125-075	1 1/4"	3/4"	1.09"	1 1/16"	0.20
HSA-125-100	1 1/4"	1"	1.25"	1 3/8"	0.24
HSA-150	1 1/2"	1 1/2"	1.69"	2"	0.35
HSA-200	2"	2"	2.11"	2 1/2"	0.57

Part #	Hose End NPSH	Adpt. End Nex Lok	A	HEX	WT [lbs]
HLA-050	1/2"	1/2"	1.20"	1.10"	0.12
HLA-075	3/4"	3/4"	1.29"	1.40"	0.29
HLA-100	1"	1"	1.66"	1.69"	0.40

ORDER DATA

QTY	Part #	QTY	Part #	QTY	Part #
	HSA-050		HNA-050		HPA-050
	HSA-050-038		HNA-075		HPA-075
	HSA-075		HNA-075-050		HPA-075-050
	HSA-075-050		HNA-100		HPA-100
	HSA-100		HNA-100-050		HPA-100-075
	HSA-100-050		HNA-100-075		HLA-050
	HSA-100-075		HNA-125		HLA-075
	HSA-125		HNA-125-075		HLA-100
	HSA-125-075		HNA-125-100		
	HSA-125-100		HNA-150		
	HSA-150		HNA-200		
	HSA-200				

MATERIALS & DESIGN DATA

Machined from solid brass, these adapters provide superior connectivity between Nexus UltraFlex female swivel hose ends and NPT pipe fittings or copper tubing. The UltraFlex hose end, where the Hose Adapters can be threaded in, has swivel fitting with NPSH (straight pipe) threads, and gasket.

All threaded ends (including NPT) have faces that are machined true and flat for maximum sealing performance against gaskets.

PROJECT _____
 CONTRACTOR _____
 PO/JOB NO. _____
 ENGINEER _____
 REPRESENTATIVE _____
 DATE _____